

# FIBER REINFORCED POLYMER (FRP) COMPOSITES REBAR

John P. Busel  
Director, Composites Growth Initiative  
American Composites Manufacturers Association  
May 23, 2012


# Outline

- About ACMA
- Introduction
- FRP Materials
- FRP Bars
- Standards & Specifications
- Applications
- Summary

# About ACMA

3

- ❑ Formed in 1979
- ❑ World's largest composites trade association representing

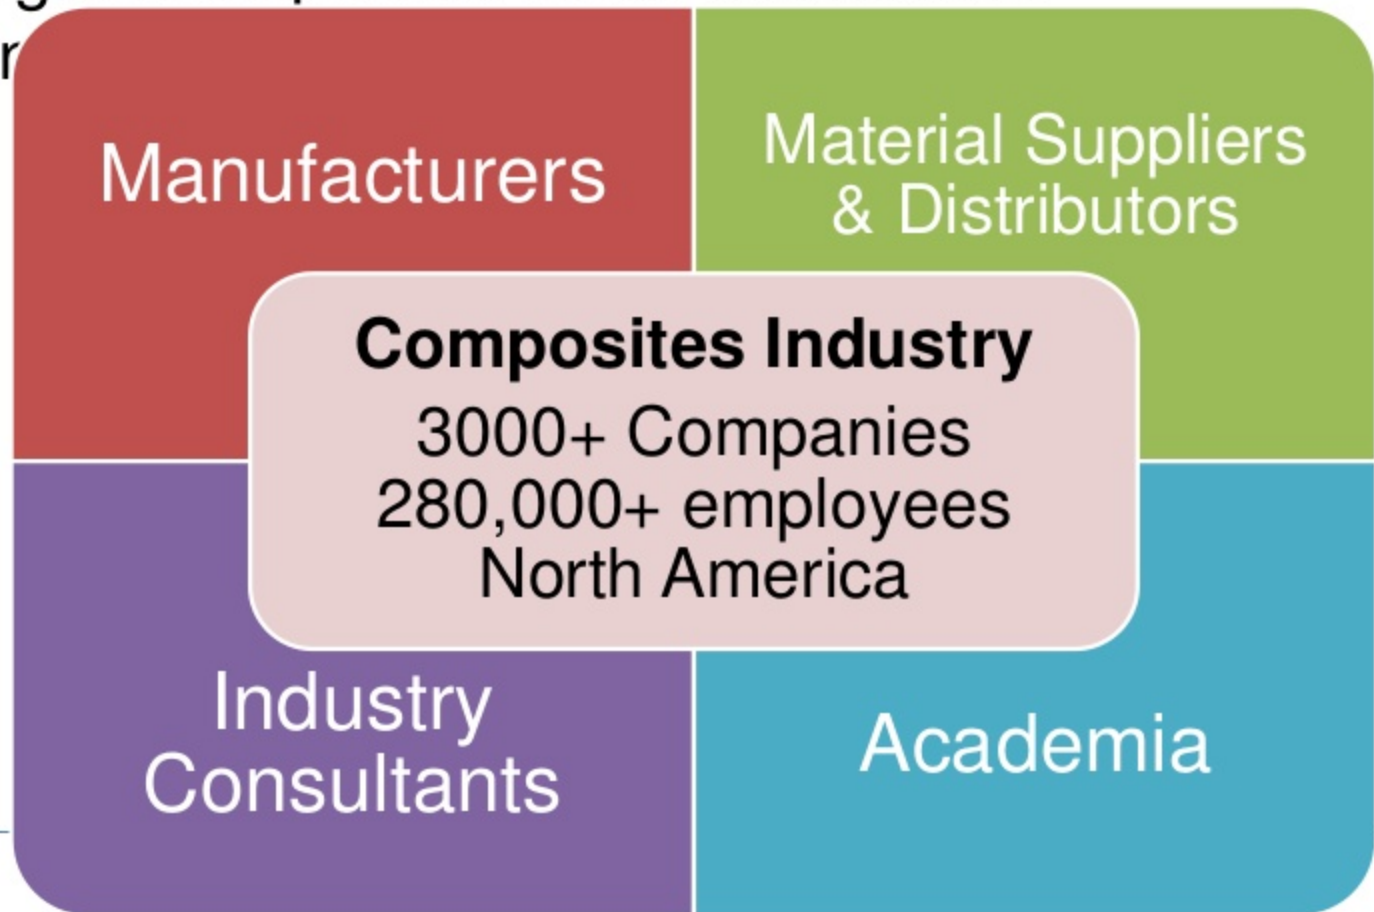

# ACMA Industry Council

- **Mission** - Promote the use and growth of FRP reinforcement (rebar, tendons & grids) in concrete and masonry applications through development of quality procedures, industry specifications, performance standards, and field application guidelines.

**FRP-RMC**  
FRP Rebar Manufacturers Council

# FRP-RMC Manufacturers

- ❑ BP Composites
- ❑ Composite Rebar Technologies, Inc.
- ❑ Hughes Brothers, Inc.
- ❑ Marshall Composite Technologies, Inc.
- ❑ Pultrall, Inc.

# Introduction

- The Problem - Corrosion
  - ▣ Corrosion and deterioration of steel reinforced concrete
  - ▣ Mitigation techniques - High costs to rehabilitate and remediate structures
  - ▣ Safety - Construction zones and detours
- The Solution – FRP Rebars
  - ▣ Non corrosive concrete reinforcement
  - ▣ Increase service life (durability)
  - ▣ Hundreds of applications in service in North

America



# Traditional Approach to Corrosion Problems

- Reduce, Eliminate, or Negate the Current Flow of the Electrochemical Corrosion Cell Inherent With Steel Reinforced Concrete
  - ✓ Admixtures
  - ✓ Increase Concrete Cover
  - ✓ Efforts to reduce permeability & mitigate cracking - HPC
  - ✓ Alter Concrete Mix
  - ✓ Membranes & Overlays
  - ✓ Epoxy coated steel
  - ✓ Cathodic protection
  - ✓ Sacrificial anodes

# FRP Materials

Why are composites different?



# FRP Materials


Constituents

## What is FRP?

### Fibers

Provide strength and stiffness

Carbon, glass, aramid

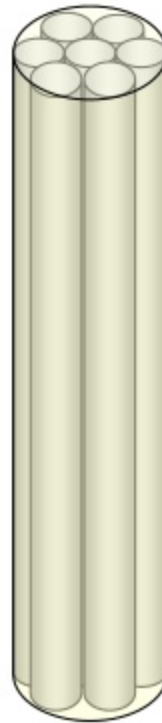

### Matrix

Protects and transfers load between fibers

Polyester, Epoxy, Vinyl Ester, Urethane

### Fiber Composite Matrix

Creates a material with attributes superior to either component alone!  
fibers and matrix both play critical roles in the composites material...

# What is different?

- FRP is Anisotropic
  - ▣ High strength in the direction of the fibers
  - ▣ This anisotropic behavior affects the shear strength, dowel action, and bond performance
- FRP does not exhibit yielding: the material is linear elastic until failure
  - ▣ Design should account for lack of ductility
  - ▣ Member does have substantial deformability


# Composites Features

- ❑ Impervious to chloride ion and chemical attack
- ❑ Tensile strength is greater than steel
- ❑ 1/4 the weight of steel
- ❑ Transparent to magnetic fields and radar frequencies
- ❑ Electrically non-conductive
- ❑ Thermally non-conductive

# Where should FRP rebar be used?

- Any concrete member susceptible to corrosion by chloride ions or chemicals
- Any concrete member requiring non-ferrous reinforcement due to Electro-magnetic considerations
- As an alternative to epoxy, galvanized, or stainless steel rebars
- Where machinery will “consume” the reinforced member ie. Mining and tunneling
- Applications requiring Thermal non-conductivity

# Tensile Stress-Strain Characteristics

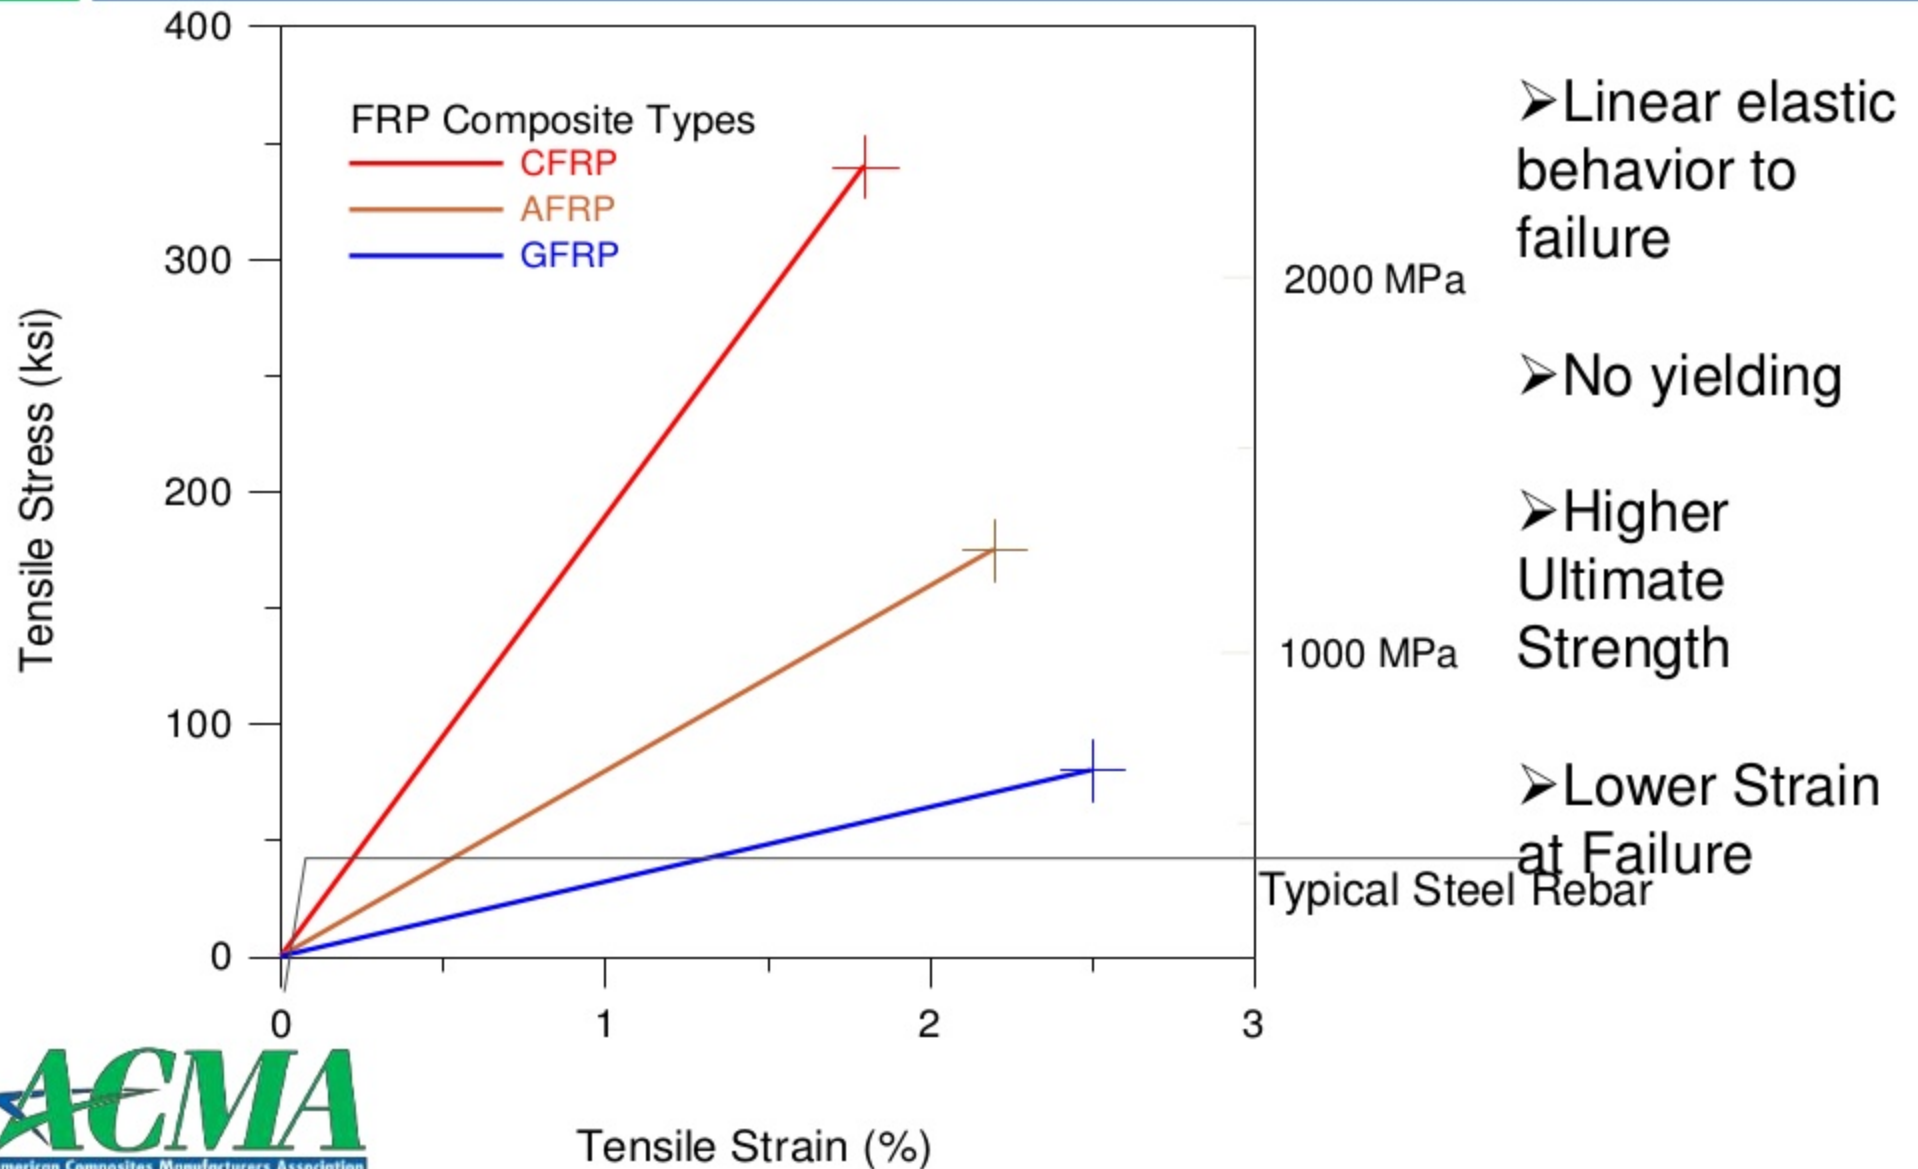



# FRP Properties

	<b>Steel</b>	<b>GFRP</b>	<b>CFRP</b>	<b>AFRP</b>
<b>Yield Stress</b> ksi (MPa)	40 - 75 (276 - 517)	N/A	N/A	N/A
<b>Tensile Strength</b> ksi (MPa)	70 - 100 (483 - 690)	70 - 230 (483 - 1600)	87 - 535 (600 - 3690)	250 - 368 (1720 - 2540)
<b>Elastic Modulus</b> X 10 <sup>3</sup> ksi (MPa)	29 (200)	5.1 - 7.4 (35 - 51)	15.9 - 84 (120 - 580)	6.0 - 18.2 (41 - 125)
<b>Yield Strain %</b>	.14 - .25	N/A	N/A	N/A

Source: ACI 440.1R-06



# Factors Affecting Material Characteristics

- Type of fiber
- Fiber volume
- Type of resin
- Fiber orientation
- Quality control procedures during manufacturing
- Rate of curing
- Void content
- Service temperature

# Coefficient of Thermal Expansion


CTE ( $10^{-6} \text{ }^{\circ} \text{F}$ )

Material	Longitudinal Direction	Transverse
Concrete	4 ~ 6	4 ~ 6
Steel	6.5	6.5
GFRP	3.5 ~ 5.6	» 12
CFRP	- 4 ~ 0	41 - 58
AFRP	- 3.3 ~ - 1.1	33 - 44

- Values of CTE differ between FRP materials and concrete.

# Effect of High Temperatures

- ❑ Resins will soften due to excessive heat
- ❑ The tensile, compressive, and shear properties of the resin diminish when temperatures approach the Glass Transition Temperature,  $T_g$
- ❑  $T_g$  values are approximately 250°F (120°C) for vinylester resins which are typically used with GFRP rebars

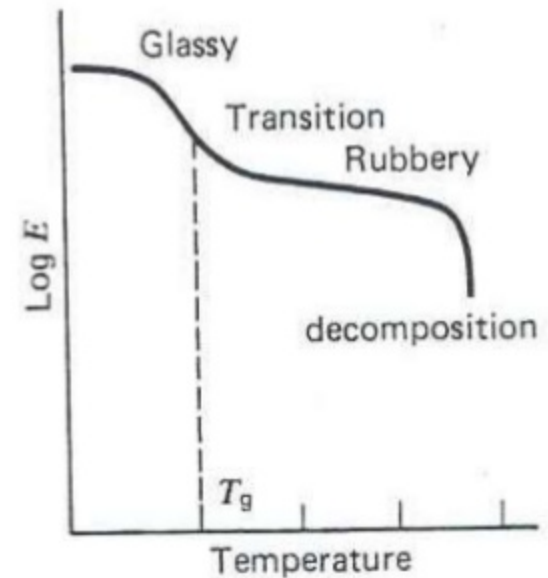


❑  $T_g$  lowers as a result of moisture absorption

# FRP bars

Looks are deceiving

# Pultrusion Process

Manufacturing  
Processes

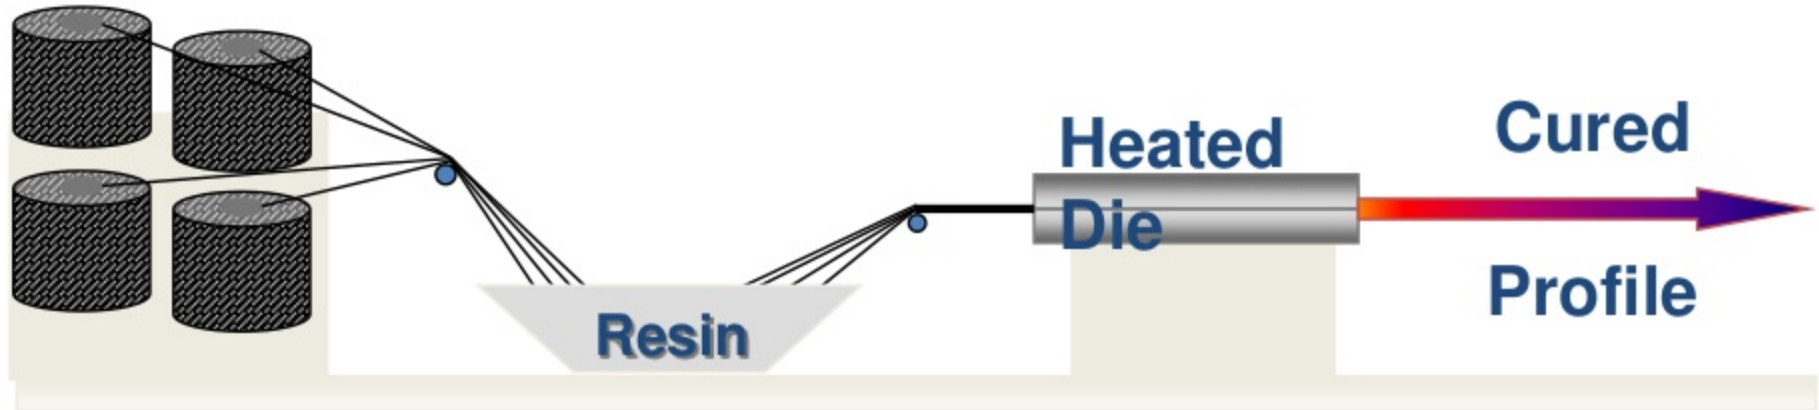

Most products are manufactured with this process

# FRP Bar Types

- Materials
  - ▣ Glass/ vinylester
  - ▣ Carbon/ vinylester
- Forms
  - ▣ Solid

