

Product Details and Certifications

Cross Reference RA Part Number: 1606-XLP50B A



Product: 1606-XLP50B

Description: Compact Power Supply, 12-15V DC, 50 W,
120/240V AC / 85-375V DC Input Voltage



Representative Photo Only (actual product may vary based on configuration sections)

POWER SUPPLY DATA

Bulletin Number	1606 Switched Mode Power Supplies
Input Voltage	100...240V AC wide range, 85...375V DC
Output Voltage	12...15V
Rated Output Watts	50 W
Operational Range	85...264V AC
Rated Input Current	<1.0 A (100V AC) / <0.6 A (196V AC)
Rated Output Current	4.2 A @ 12V / 3.4 A @ 15V




CERTIFICATIONS AND APPROVALS

UL
CE
IEC/EN
EMC

For UL Certifications Directory:

<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>



			
Bulletin	1606-XLS	1606-XLE	1606-XLP
Type	Performance Single/Three-Phase	Essential Single/Three-Phase	Compact Single/Two-Phase
Output Power	80...960 W	80...960 W	15...100 W
Input Voltage/ Primary Voltage	100...240, 323...576V AC		
Efficiency	91.6...95%	90...92%	80...90%
Output Voltage/ Secondary Voltage	12...15, 24, 30, 36, 48V DC	12, 24, 48V DC	5, 10...12, 12, 15, 24, 48V DC
Rated Output Current	3.3...40 A	3.3...40 A	0.6...4.5 A
Operating Temperature Range	-25...+70 °C >60 °C with derating	-25...+70 °C >60 °C with derating	-40...+70 °C >60 °C with derating
Non-Operating Temperature Range	-40...+85 °C		
Certifications	cULus, CE, GL, ATEX	UL, CE, CSA, GL	cULus, CE, CSA, GL
Standards Compliance	EN 55011 (Class B), EN 55022 (Class B), EN 61000-6-2, EN 61000-3-2 (A14), EN 50081-1, UL 508, UL 1950, RoHS, Class 1 Div. 2	EN 55011 (Class B), EN 55022 (Class B), EN 61000-6-2, EN 61000-3-2 (A14), EN 50081-1, UL 508, UL 1950, CAN/CSA C22.2 No. 107-1, RoHS, Class 1, Div. 2	EN 50081-1, EN 61000-6-2, EN 61000-3-2 (A14), UL 508, UL 60950, CAN/CSA C22.2 No. 60950, RoHS, Class 1, Div. 2
Special Application Products	- Compact redundancy module for 10...60V DC - Buffer module for extended ride-through - Redundancy modules - Redundant power supplies - DC UPS - DC converter		
Product Selection	Page 8-9	Page 8-10	Page 8-11



Bulletin 1606 — Power Supplies**

- Quick mounting and connecting, innovative DIN-Rail mount, smallest in class
- UL Listed NEC Class 2; Class 1, Div. 2; Semi F47; ODVA Approved
- Low inrush current limiting
- PFC Active or Passive
- Wide range input; auto select input
- Superior overload design (continuous current, no hiccup)
- NEC Class 2 'Limited Power' options
- Selectable operating mode (single/parallel)
- Superior efficiency and temperature rating

Special Modules

- Brownout buffer, DC to DC converter, N+1 redundancy, DC UPS

Standards Compliance

- World-wide Certifications
- NEC Class 2
- Class 1 Div. 2 (T3A)
- cULus, CE, C-Tick, ATEX
- SEMI F47 Compatible
- ABS/GL/RINA (Marine)

Certifications



Table of Contents

Product Sizing	this page
Quick Guide	8-8
Special Applications	8-8
Catalog Number	
Explanation	8-9
Product Selection	8-9
Specifications and Approximate Dimensions	8-13

* Not all features apply to all power supplies; see individual power supply descriptions for specifics

** A more detailed list of performance specifications can be found at the Allen-Bradley web site
http://www.ab.com/industrialcontrols/products/power_supplies/index.html

How to Select a Bulletin 1606 Power Supply

The Bulletin 1606 line of Power Supplies is designed with "reserve power" thereby eliminating the need to oversize your power supply to start high inrush loads.

Steps to size a Power Supply

1. Determine the "Average" continuous current of the load and the typical inrush current.
2. Select a power supply where the rated load is at/or below the current of the device and the Peak Current is less than the short-circuit rating of the power supply.

Notes:


- ReservePower will deliver up to 25% additional current continuously.
- PowerBoost will deliver 150% of rated current for up to 5 s.

Example:

Application: Single Phase 120V input, 24V output, 5 A continuous current with 7.5 A inrush current

Solution: 1606-XLS120E

Output Characteristic for XLS120E (5 A) Power Supply

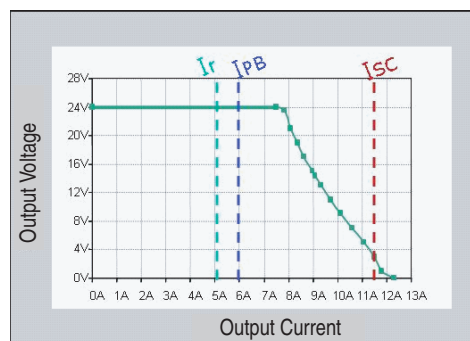

IRATED: 5 A
ISHORT CIRCUIT: >9 A
IPOWER BOOST: 7.5 A

Cat. No.	I _{RATED} [A]	I _{SHORT CIRCUIT} (25 °C) [A]	I _{POWER BOOST OR} I _{RESERVEPOWER} [A]
1606-XLS80E	3.3	5.2	5.4§
1606-XLS120E	5	9	7.5§
1606-XLS240E	10	21	15§
1606-XLS480E	20	30	30§
1606-XLS480E-3	20	29	30§
1606-XLSDNET4	3.8	4	—
1606-XLSDNET8	8	7	—
1606-XLE80E	3.3	5.5	3.6
1606-XLE120E	5	11	6
1606-XLE240E	10	16	12

§ Products with ReservePower.

⚡ Short circuit current values are temperature dependent for the selected product; i.e., the higher the ambient temperature, the lower the short circuit current.

➤ Hiccup Overload design.

Quick Guide

Bulletin 1606-(number from table) % Power Supply Quick Guide

	15 W	50 W	60 W	72...80 W	90...100 W	120 W	180 W	240 W	480 W	720 W	960 W
5...5.5V	XLP15A XLP25A	—	—	—	—	—	—	—	—	—	—
10...12V	XLP30B	—	—	—	—	—	—	—	—	—	—
12...15V 1-Ph	XLP15B	XLP50B	XLP60BQ XLP60BQT	—	XLP90B	—	XL180B	—	—	—	—
12...15 V 3-Ph	—	—	—	—	XLE96B	—	—	—	—	—	—
(+/-)12 and 15V	XLP36C	—	—	—	—	—	—	—	—	—	—
24...28V 1-Ph	XLP15E XLP30E XLP30EQ	XLP50E XLP50EZ	XL60D XLP60EQ XLP60EQT	XLS80E XLE80E XLP72E	XLP95E XLP100E	XLS120E XLS120EA XLE120E XLE120EC XLE120EE XLE120EN	—	XLS240E XLS240EC XLE240E XLE240EP XLE240EE XLE240EN	XLS480E XLS480EA XLS480EC XLS480EE	—	XLS960EE
24...28V 2-Ph/3-Ph	—	—	—	—	XLP90E-2 XLP100E-2	XLE120E-2	—	XL240E-3C XLE240E-3	XLS480E-3 XLS480E-3C	XL720E-3	XLE960DX-3N XLS960E-3
36...43V	—	—	—	—	—	—	—	—	XLS480G-3	—	—
48...56V 1-Ph	—	XLP50F	—	—	XLP100F	—	—	XLE240F	XLS480F	—	XLS960FE
48...56V 3-Ph	—	—	—	—	—	—	—	XLE240F-3	XLS480F-3	—	XLE960MX-3N XLS960F-3
24V Redundant	—	—	XL60DR	—	—	XL120DR	—	XL240DR	—	—	—
DeviceNet	—	—	—	XLEDNET3	XLSDNET4	—	—	XLSDNET8	—	—	—

% Example: For a 24...28 Volt, 3-Phase, 120 Watt power supply, the Cat. No. would be **1606-XL120E-3**.

Special Applications

Bulletin Number	NEC Class 2	ABS/GL Marine	Hazardeous Location Rating, Class 1 Div 2	ODVA Requirements	Conformal Coating	ATEX
1606-XLE	XLE80E	All XLE Power Supplies	All XLE Power Supplies	XLEDNET3	XLE120EC	—
1606-XLP	XLP15A XLP15B XLP15E XLP25A XLP30B XLP30E XLP36C XLP50B XLP50E XLP50EZ XLP50F XLP72E XLP90B XLP90E-2 XLP95E	XLP15A XLP15B XLP15E XLP25A XLP30E XLP36C XLP50E XLP50EZ XLP72E XLP90B XLP100E XLP100F XLPRED	XLP15A XLP15B XLP15E XLP25A XLP30B XLP30E XLP50B XLP50E XLP50EZ XLP72E XLP90B XLP95E XLP100E XLPRED	—	—	—
1606-XLS	XLSDNET4	ALL XLS Power Supplies	All XLS Power Supplies*	XLSDNET4 XLSDNET8	XLS240EC XLS480E-C XLS480E-3C	XLS120EA XLS240EA XLS480EA

* Cat. No. 1606-XLS240K does not have Hazardeous Location Rating.

Catalog Number Explanation

Important: The following cat. no. breakdown is for explanation purposes only. It is not a product configurator. Not all combinations of fields are valid product cat. nos. First, select the desired power supply using the Product Selection tables. Then, use this breakdown for verification and explanation only.

➔ **1606 - XLP 50 B -**

a b c d e

<i>a</i> Power Supply Type		<i>b</i> Rated Output Watts		<i>c</i> Output Voltage		<i>e</i> Multi-Phase Variations	
Code	Description	Code	Description	Code	Description	Code	Description
XLP	Compact family	15	15 W	A	5V DC		Can be left blank
XLS	Performance family	25	25 W	B	10...12V DC or 12...15 V DC	-2	Two phase
XLE	Essential family	30	30 W	C	Dual +/- 12 and 15V DC	-3	Three phase
		36	36 W	D	24V DC	-3C	Three phase, conformal coating
		40	40 W	E	24...28V DC	-3H	Three phase, input voltage 400V AC and 450...700V DC
		50	50 W	F	48...56V DC	-3N	Three phase, input voltage 480V AC
		60	60 W	G	36...43V DC	-D	360...900V - DC Only
		72	72 W	M	48V DC		
		80	80 W				
		90	90 W				
		95	95 W				
		100	100 W				
		120	120 W				
		180	180 W				
		240	240 W				
		480	480 W				
		720	720 W				
		960	960 W				

<i>d</i> Special Functions	
Code	Description
	Can be left blank
C	Conformal coating
R	Redundancy module
P	Power factor correction
Z	Removeable Terminations
X	Semi-Regulated
E	Regional voltage; 230V AC input only
N	Regional voltage; 120V AC input only
A	ATEX

Note: Special output signals are only available with the 960 W power supply.

Product Selection

1606-XLS Performance — Single- and Three-Phase

Single-Phase

Input Voltage	Output Power [W]	Output Voltage	Output Current [A]	Input Circuit Protection*	Steady State Input Current 120/230 [V AC]	Parallel Operation	DC OK Relay	Cat. No.
100...240V AC, 110...300V DC	80	24...28	3.3	6 A Slow Blow Fuse or Cat. No. 1489-A1C060	1.41/0.82	Yes	—	1606-XLS80E
	120	24...28	5		1.10/0.62	Yes	✓	1606-XLS120E
	120	24...28	5		1.10/0.62	Yes	✓	* 1606-XLS120EA
	180	12...15	15		1.65/0.93	Yes	✓	1606-XLS180B
	240	24...28	10	6 A Slow Blow Fuse or Cat. No. 1489-A1C060	2.22/1.22	Yes	✓	1606-XLS240E
	240	24...28	10		2.22/1.22	Yes	✓	* 1606-XLS240EA
	240	24...28	10		2.22/1.22	Yes	✓	➤ 1606-XLS240EC
	240	48...56	5		2.22/1.22	Yes	✓	1606-XLS240F
	240	28...32	8		2.22/1.22	Yes	✓	1606-XLS240K
	480	24...28	20	10 A Slow Blow Fuse or Cat. No. 1489-A1C100	4.56/2.48	Yes	✓	1606-XLS480E
	480	24...28	20		4.56/2.48	Yes	✓	➤ 1606-XLS480EC
	480	24...48	20		4.56/2.48	Yes	✓	* 1606-XLS480EA
200...240V AC	480	48...56	10		4.56/2.48	Yes	✓	1606-XLS480F
100...240V AC, 110...300V DC	480	36...42	13.3		4.56/2.48	Yes	✓	1606-XLS480G
200...240V AC, 220...300V DC	960	24...28	40		—/4.6	Yes	✓	1606-XLS960EE

* Unit has internal (not accessible/replaceable) input fuse. Additional protection is not required if used on branch circuits ≤ UL test levels. Consult local codes and regulations for installation.

➤ The **C** suffix in the Cat. No. indicates that the product has **conformal coating**.

* The **A** suffix in the Cat. No. indicates that the product carries the **ATEX** rating.

1606-XLP Compact — Single- and Two-Phase
Single-Phase

Input Voltage	Output Power [W]	Output Voltage	Output Current [A]	Input Circuit Protection	Steady State Input Current 120/230 [V AC]	Parallel Operation	DC OK Relay	Cat. No.	
100...240V AC, 85...375V DC	15	5...5.5	3	10 A Slow Blow Fuse or Cat. No. 1489-A1C100/15 A*	0.28/0.17	Yes	—	1606-XLP15A	
		12...15	1.3		0.28/0.17		—	1606-XLP15B	
		24...28	0.6		0.28/0.17		—	1606-XLP15E	
	25	5...5.5	5		0.60/0.30	Yes	—	1606-XLP25A	
		30	10...12		3		0.60/0.25	Yes	—
	24...28		1.3		0.60/0.35	—	1606-XLP30E		
	36	+/- 12/15V	2.8		0.54/0.30	No	—	1606-XLP30EQ	
					0.65/0.40		—	1606-XLP36C	
					1.00/0.60		Yes	—	1606-XLP50B
	50	24...28	2.1		0.77/0.44	Yes	—	1606-XLP50E	
					1.00/0.60		Yes	—	1606-XLP50EZ
					1.00/0.60		Yes	—	1606-XLP50F
					0.91/0.54		Yes	—	1606-XLP60BQ
	0.97/0.61	—	1606-XLP60BQT						
	60	24...48	2.1		0.98/0.58	Yes	—	1606-XLP60EQ	
	60	24...48	2.1		1.05/0.66	Yes	—	1606-XLP60EQT	
100...120/220...240V AC, 220...375V DC	72	24...28	3	1.60/0.80	Yes	—	1606-XLP72E		
100...200/200...240V AC, 220...375V DC	90	12...15	7.5	1.90/0.90	Yes‡	—	1606-XLP90B		
	95	24...28	3.9	2.00/0.95	No	—	1606-XLP95E		
				2.10/1.00		Yes‡	—	1606-XLP100E	
				2.10/1.00		Yes‡	—	1606-XLP100F	

Two-Phase

Input Voltage	Output Power [W]	Output Voltage	Output Current [A]	Input Circuit Protection	Steady State Input Current 400...480 [V AC]	Parallel Operation	DC OK Relay	Cat. No.
380...480V AC	90	24...28	3.75	10 A Slow Blow Fuse or Cat. No. 1489-A1C100/ 20 A*	2 x 0.36	No‡	—	1606-XLP90E-2
380...480V AC	100	24...28	4.2		2 x 0.40	Yes‡	—	1606-XLP100E-2

* Unit has internal (not accessible/replaceable) input fuse. Additional protection is not required if used on branch circuits ≤ UL test levels.
‡ Single/parallel operation (inclined characteristic) selectable (jumper). Consult local codes and regulations for installation.

Bulletin 1606 Back-of-Panel Brackets

Instead of snapping the power supply onto a DIN Rail, you can mount it to the back of the panel. This set consists of two steel brackets which replace the existing DIN Rail aluminum brackets at the back of the unit.

Note: You need one set per unit.

Description	Cat. No.
Back-of-panel bracket for XLS and XLE power supplies, below 20 A	1606-XLB
Back-of-panel bracket for XLS and XLE power supplies, 20 A and above	1606-XLC

Bulletin 1606-XLP

	1606-XLP15A	1606-XLP15B	1606-XLP15E	1606-XLP25A
Output Volts/Watts	5...5.5V/15 W	12...15V/15 W	24...28V/15 W	5...5.5V/25 W
Input Voltage (47...63 Hz)	100...240V AC wide range; 85...370V DC			
Operational Range	85...264V AC			
Hold-up Time	>168 ms (230V AC) >45 ms (100V AC)	>191 ms (230V AC) >46 ms (100V AC)	>196 ms (230V AC) >47 ms (100V AC)	>170 ms (230V AC) >19 ms (100V AC)
Rated Input Current	<0.28 A (100V AC) <0.17 A (196V AC)			<0.5 A (100V AC) <0.35 A (196V AC)
Efficiency	typ. >77%	typ. >83%	typ. >88%	typ. >80%
Output Voltage	5...5.5V 5.1V preset	12...15V	24...28V	5...5.5V 5.1V preset
Rated Output Current	3 A	1.0...1.3 A	0.54...0.63 A	5 A (at 5.1V), 4.5 A (at 5.5V)
Ripple/Noise	<50 mV _{pp}	<75 mV _{pp}	<50 mV _{pp}	<50 mV _{pp}
Operating Temperature Range (T _{amb})	-10...+70 °C, >60 °C: 0.4 W/K derating			-10...+70 °C >60 °C: 0.5 W/K derating
Non-Operating Temperature Range	-40...+85 °C			
MTBF*	2 686 000 hours	3 811 000 hours	4 369 000 hours	600 000 hours
Dimensions (W x H x D)	22.5 x 75 x 91 mm			45 x 75 x 91 mm
Weight	130 g			240 g
Certifications/Standards*	1, 2, 4, 5, 7, 9			
Special Features	NEC Class 2 power supply; ABS/GL/RINA (Marine); Class 1 Div. 2			

* 1) = CE, 2) = UL 508 (cULus LISTED), 3) = UL 1950 (cURus), 4) = CSA C22.2, No. 60950, 5) Safety standards = IEC/EN 60950, EN 50178, 6) EMC standards = EN 55011 (Class B), EN 55022 (Class B), EN 61000-6-2, 7) EMC standards = EN 61000-3-2 (A14), EN 50081-1, 9) ABS/GL/RINA (Marine)

* MTBF determined by Siemens norm SN 29500 at full load current and 40 °C



	1606-XLP30B	1606-XLP30E	1606-XLP30EQ	1606-XLP36C	1606-XLP50B
Output Volts/Watts	10...12V/30 W	24...28V/30 W	24...28V/30 W	±12V/±15V/36 W	12...15V/50 W
Input Voltage (47...63 Hz)	100...240V AC wide range; 85...375V DC				
Operational Range	85...264V AC				
Hold-up Time	>170 ms (230V AC) >18 ms (100V AC)	>190 ms (230V AC) >19 ms (100V AC)	>141 ms (230V AC) >31 ms (100V AC)	>180 ms (230V AC) >18 ms (100V AC)	>170 ms (230V AC) >17 ms (100V AC)
Rated Input Current	<0.6 A (100V AC) <0.25 A (240V AC)	<0.6 A (100V AC) <0.35 A (196V AC)	<0.54 A (100V AC) <0.3 A (230V AC)	<0.65 A (AC 100V AC) <0.4 A (AC 196V AC)	<1.0 A (100V AC) <0.6 A (196V AC)
Efficiency	typ. 84%	typ. 87.5%	typ. 88.5%	typ. 86%	typ. 90%
Output Voltage	10...12V 12V preset (with jumper), 10...12V adjustable (without jumper)	24...28V 24.5V preset	24...28V	±12V (without jumper), ±15V (with jumper) ±15V preset	12...15V 15V preset (with jumper) 12...15V adjustable (without jumper)
Rated Output Current	3 A (@ 10V), 2.5 A (@ 12V)	1.3 A (@ 24.5V), 1 A (@ 28V)	1.3 A (@ 24V), 1 A (@ 28V)	0...2.8 A (@ +12V), 0...1.4 A (@ -12V) 0...2.4 A (@ +15V), 0...1.4 A (@ -15V)	4.2 A (@ 12V), 3.4 A (@ 15V)
Ripple/Noise	<10 mV _{pp}	<50 mV _{pp}	<50 mV _{pp}	<50 mV _{pp}	<100mV _{pp}
Operating Temperature Range (T _{amb})	-10...+70 °C >60 °C: 0.6 W/K derating	-10...+70 °C >60 °C: 0.5 W/K derating	-10...+70 °C >60 °C: 0.8 W/K derating	-10...+70 °C > 60 °C: 1 W/K derating	-10...+70 °C >60 °C: 1 W/K derating
Non-Operating Temperature Range	-10...+70 °C >60 °C: 0.6 W/K derating	-10...+70 °C >60 °C: 0.5 W/K derating	-10...+70 °C >60 °C: 0.5 W/K derating	-10...+70 °C > 60 °C: 1 W/K derating	-10...+70 °C >60 °C: 1 W/K derating
MTBF*	appr. 650 000 hours		2 123 000 hours	600 000 hours	appr. 600 000 hours
Dimensions (W x H x D)	45 x 75 x 91 mm	45 x 75 x 91 mm	22.5 x 75 x 91 mm	45 x 75 x 91 mm	45 x 75 x 91 mm
Weight	250 g	230 g	140 g	240 g	260 g
Certifications/Standards*	1, 2, 4, 5, 7, 9				
Special Features	NEC Class 2 power supply; Class 1 Div. 2, ABS/GL/RINA (Marine)	NEC Class 2 power supply; Class 1 Div. 2; Semi F47, ABS/GL/RINA (Marine)	NEC Class 2 power supply; Class 1 Div. 2; Semi F47, ABS/GL/RINA (Marine)	Output voltage adjustable: DC ±12V without jumper or DC ±15V with jumper; NEC Class 2 power supply; Class 1 Div. 2; ABS/GL/RINA (Marine)	Output voltage adjustable: DC 12...15V without jumper or DC 15V with jumper; NEC Class 2 power supply; Class 1 Div. 2 ABS/GL/RINA (Marine)

* 1) = CE, 2) = UL 508 (cULus LISTED), 3) = UL 1950 (cURus), 4) = CSA C22.2, No. 60950, 5) Safety standards = IEC/EN 60950, EN 50178, 6) EMC standards = EN 55011 (Class B), EN 55022 (Class B), EN 61000-6-2, 7) EMC standards = EN 61000-3-2 (A14), EN 50081-1, 9) ABS/GL/RINA (Marine)

* MTBF determined by Siemens norm SN 29500 at full load current and 40 °C