

HYDRONIC PANEL RADIATORS

MANUFACTURED BY:



Hydronic panel radiators are not only high performance – elegance, superb finish and design are an integral part of the completed product.

Made using top quality techniques and materials, it guarantees high thermal efficiency and great reliability. Interior design trends change and redefine spaces, but its compact essential shape is always modern and versatile.



25 YEAR*
WARRANTY



FINISHES

High gloss white, unique finish both scratch and corrosion resistant.

COLOUR

Standard white - RAL 9016.

MEASUREMENTS

Heights from 300mm to 900mm. Widths from 400mm up to 3000mm.

Available as single, compact, double and triple panels.



HUNT HEATING
The smart choice.

CENTRE CONNECTION (OPTIONAL)



TOP GRILLE



SHOWROOM

11 Fiveways Boulevard
Keysborough
VIC 3173

PHONE 1300 00 1800

FAX (+613) 9798 5133

enquiries@huntheat.com.au

www.huntheat.com.au

Tables based on ΔT 60° C - mean water temperature in radiator of 80°C and room temperature of 20°C.
Radiator outputs to EN442 Standard. - NB: High sizes available for order (not ex stock).

Type 11 Single						
L-mm	H-mm	300	400	500	600	700
400	kW	0.286	0.365	0.440	0.513	0.584
500	kW	0.357	0.456	0.551	0.642	0.730
600	kW	0.429	0.547	0.661	0.770	0.876
700	kW	0.500	0.638	0.771	0.898	1.022
800	kW	0.572	0.730	0.881	1.027	1.168
900	kW	0.643	0.821	0.991	1.155	1.314
1000	kW	0.715	0.912	1.101	1.283	1.460
1100	kW	0.786	1.003	1.211	1.412	1.606
1200	kW	0.857	1.094	1.321	1.540	1.752
1400	kW	1.000	1.277	1.541	1.798	2.044
1600	kW	1.143	1.459	1.762	2.053	2.336
1800	kW	1.286	1.642	1.982	2.310	2.628
2000	kW	1.429	1.824	2.202	2.566	2.920
2300	kW	1.644	2.098	2.532	2.951	3.358
2600	kW	1.858	2.371	2.863	3.336	3.796
3000	kW	2.144	2.736	3.303	3.850	4.380



Type 21 Compact						
L-mm	H-mm	300	400	500	600	700
400	kW	0.419	0.525	0.629	0.731	0.832
500	kW	0.523	0.657	0.786	0.918	1.040
600	kW	0.628	0.788	0.913	1.096	1.248
700	kW	0.733	0.919	1.100	1.278	1.456
800	kW	0.837	1.050	1.257	1.461	1.664
900	kW	0.942	1.182	1.415	1.644	1.872
1000	kW	1.046	1.313	1.572	1.828	2.080
1100	kW	1.151	1.444	1.729	2.009	2.288
1200	kW	1.256	1.576	1.886	2.192	2.496
1400	kW	1.465	1.838	2.200	2.557	2.912
1600	kW	1.674	2.101	2.515	2.922	3.328
1800	kW	1.884	2.364	2.829	3.287	3.744
2000	kW	2.093	2.626	3.144	3.653	4.160
2300	kW	2.407	3.020	3.615	4.200	4.784
2600	kW	2.721	3.414	4.087	4.748	5.408
3000	kW	3.139	3.939	4.715	5.479	6.240




Type 22 Double						
L-mm	H-mm	300	400	500	600	700
400	kW	0.505	0.646	0.778	0.901	1.016
500	kW	0.631	0.807	0.972	1.128	1.271
600	kW	0.757	0.969	1.166	1.351	1.525
700	kW	0.883	1.130	1.361	1.576	1.779
800	kW	1.009	1.292	1.555	1.802	2.033
900	kW	1.136	1.453	1.750	2.027	2.287
1000	kW	1.262	1.615	1.944	2.252	2.541
1100	kW	1.388	1.776	2.139	2.477	2.795
1200	kW	1.514	1.938	2.333	2.702	3.049
1400	kW	1.766	2.261	2.722	3.153	3.558
1600	kW	2.019	2.584	3.111	3.603	4.066
1800	kW	2.271	2.906	3.499	4.054	4.574
2000	kW	2.523	3.229	3.888	4.504	5.082
2300	kW	2.902	3.714	4.472	5.180	5.845
2600	kW	3.280	4.198	5.055	5.855	6.607
3000	kW	3.785	4.844	5.832	6.758	7.623



Type 33 Triple						
L-mm	H-mm	300	400	500	600	700
400	kW	0.712	0.907	1.091	1.264	1.425
500	kW	0.889	1.134	1.363	1.580	1.782
600	kW	1.067	1.361	1.636	1.895	2.138
700	kW	1.245	1.587	1.909	2.211	2.495
800	kW	1.423	1.814	2.181	2.527	2.851
900	kW	1.601	2.041	2.454	2.843	3.207
1000	kW	1.779	2.268	2.727	3.159	3.564
1100	kW	1.957	2.495	2.999	3.475	3.920
1200	kW	2.135	2.721	3.272	3.791	4.276
1400	kW	2.491	3.175	3.817	4.423	4.989
1600	kW	2.846	3.628	4.363	5.055	5.702
1800	kW	3.202	4.082	4.908	5.686	6.415
2000	kW	3.558	4.536	5.453	6.318	7.127
2300	kW	4.092	5.216	6.271	7.266	8.197
2600	kW	4.625	5.896	7.089	8.214	9.266
3000	kW	5.337	6.803	8.180	9.477	10.691



Standard bracket supplied with DeLonghi radiators

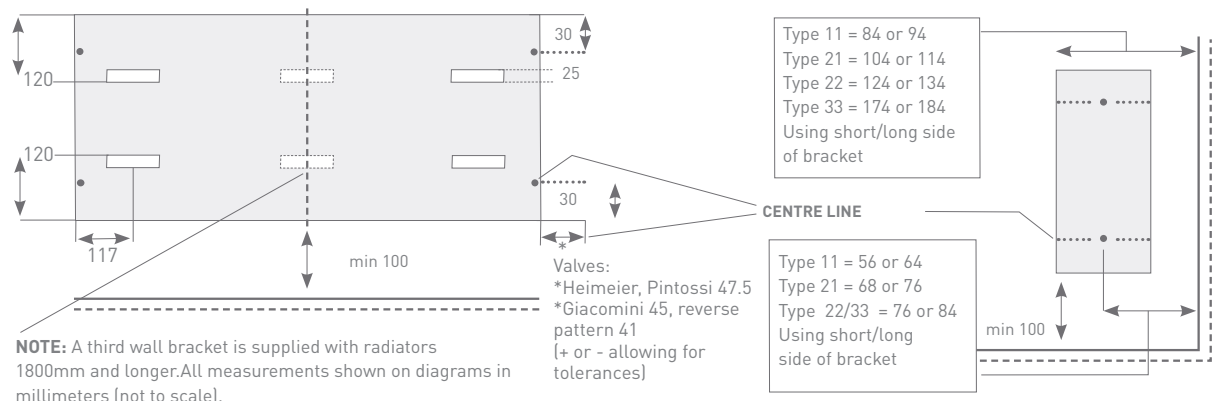

Instructions for placement of noggins for De Longhi radel steel panel radiators.

Suggested size for noggins; 90mm x 40mm framing timber installed vertically to either side of the radiator and set in 116mm from side of radiator. This will ensure you have suitable fixing for brackets.

NOTE: All measurements shown on diagrams in millimeters (not to scale).